




CYCLOPS RANGE



switch2slim

- CYCLOPS LED DOWN LIGHTS & PANEL LIGHTS
- LED ENERGY SAVING TECHNOLOGY
- AVAILABLE IN WARM WHITE & COOL WHITE
- STYLISH SILVER & WHITE SURROUNDS
- COMPLETE WITH DRIVER, OPTIONAL DIMMER DRIVER
- SQUARE FITTINGS AVAILABLE
- AVAILABLE IN 3W, 6W, 12W, 18W & 24W



Cut Out Sizes:

| Model: | D max (mm) |
|---------|------------|
| 3 Watt | 64 |
| 6 Watt | 105 |
| 12 Watt | 155 |
| 18 Watt | 205 |

3W LED ROUND FLUSH DOWNLIGHT 

3W LED (75lm per Watt), AC200-250VAC, 160°
Beam angle, SILVER & WHITE SURROUNDS.
**COOL WHITE ($\pm 6000\text{K}$) & WARM WHITE
($\pm 2800\text{K}$) - NON DIMMABLE**


COMPLETE WITH ELECTRONIC DRIVER



OL-CY03W-CW-N / OL-CY03W-WW-N

OL-CY03S-CW-N / OL-CY03S-WW-N

SIZE:



6W LED ROUND FLUSH DOWNLIGHT 

6W LED (75lm per Watt), AC200-250VAC, 160°
Beam angle, SILVER & WHITE SURROUNDS.
**COOL WHITE ($\pm 6000\text{K}$) & WARM WHITE
($\pm 2800\text{K}$) - NON DIMMABLE**


COMPLETE WITH ELECTRONIC DRIVER



OL-CY06W-CW-N / OL-CY06W-WW-N

OL-CY06S-CW-N / OL-CY06S-WW-N

SIZE:



12W LED ROUND FLUSH DOWNLIGHT 

12W LED (75lm per Watt), AC200-250VAC,
160° Beam angle, SILVER & WHITE SURROUNDS.
**COOL WHITE ($\pm 6000\text{K}$) & WARM WHITE
($\pm 2800\text{K}$) - NON DIMMABLE**


COMPLETE WITH ELECTRONIC DRIVER



OL-CY12W-CW-N / OL-CY12W-WW-N

OL-CY12S-CW-N / OL-CY12S-WW-N

SIZE:



18W LED ROUND FLUSH DOWNLIGHT 

18W LED (75lm per Watt), AC200-250VAC,
160° Beam angle, SILVER & WHITE SURROUNDS.
**COOL WHITE ($\pm 6000\text{K}$) & WARM WHITE
($\pm 2800\text{K}$) - NON DIMMABLE**


COMPLETE WITH ELECTRONIC DRIVER



OL-CY18W-CW-N / OL-CY18W-WW-N

OL-CY18S-CW-N / OL-CY18S-WW-N

SIZE:



REFER TO PAGES 95 & 96 FOR VOLTAGE STABILISER, CAPACITOR, SPARE DRIVERS & DIMMERS.

6W LED SQUARE FLUSH DOWN LIGHT 

6W LED (75lm per Watt), AC200-250VAC, 160° Beam angle, SILVER & WHITE SURROUNDS. **COOL WHITE ($\pm 6000\text{K}$) & WARM WHITE ($\pm 2800\text{K}$) - NON DIMMABLE**


COMPLETE WITH ELECTRONIC DRIVER



OL-CYS06W-CW-N / OL-CYS06W-WW-N



OL-CYS06S-CW-N / OL-CYS06S-WW-N



12W LED SQUARE FLUSH DOWNLIGHT 

12W LED (75lm per Watt), AC200-250VAC, 160° Beam angle, SILVER & WHITE SURROUNDS. **COOL WHITE ($\pm 6000\text{K}$) & WARM WHITE ($\pm 2800\text{K}$) - NON DIMMABLE**


COMPLETE WITH ELECTRONIC DRIVER



OL-CYS12W-CW-N / OL-CYS12W-WW-N



OL-CYS12S-CW-N / OL-CYS12S-WW-N




18W LED SQUARE FLUSH DOWN LIGHT 

18W LED (75lm per Watt), AC200-250VAC, 160° Beam angle, SILVER & WHITE SURROUNDS. **COOL WHITE ($\pm 6000\text{K}$) & WARM WHITE ($\pm 2800\text{K}$) - NON DIMMABLE**



OL-CYS18W-CW-N / OL-CYS18W-WW-N

OL-CYS18S-CW-N / OL-CYS18S-WW-N



COMPLETE WITH ELECTRONIC DRIVER

24W LED SQUARE FLUSH DOWN LIGHT 

24W LED (75lm per Watt), AC200-250VAC, 160° Beam angle, WHITE SURROUNDS. **COOL WHITE ($\pm 6000\text{K}$) & WARM WHITE ($\pm 2800\text{K}$) - NON DIMMABLE**




OL-CYS24W-CW-N

OL-CYS24W-WW-N



COMPLETE WITH ELECTRONIC DRIVER



Cut Out Sizes:

| | |
|---------|-----|
| 6 Watt | 105 |
| 12 Watt | 155 |
| 18 Watt | 205 |
| 24 Watt | 280 |


REFER TO PAGES 95 & 96 FOR VOLTAGE STABILISER, CAPACITOR, SPARE DRIVERS & DIMMERS.

**6W LED ROUND SURFACE
DOWNLIGHT**



6W LED (75lm per Watt), AC85-285VAC, 160° Beam angle, IP20,
**COOL WHITE (±6000K) & WARM WHITE (±2800K) -
NON DIMMABLE**

COMPLETE WITH BUILT-IN ELECTRONIC DRIVER




OL-SMR6W-CW / OL-SMR6W-WW

**12W LED ROUND SURFACE
DOWNLIGHT**



12W LED (75lm per Watt), AC85-285VAC, 160° Beam angle,
IP20, **COOL WHITE (±6000K) & WARM WHITE (±2800K)
- NON DIMMABLE**

COMPLETE WITH BUILT-IN ELECTRONIC DRIVER



OL-SMR12W-CW / OL-SMR12W-WW

**6W LED SQUARE SURFACE
DOWNLIGHT**



6W LED (75lm per Watt), AC85-285VAC, 160° Beam angle, IP20,
**COOL WHITE (±6000K) & WARM WHITE (±2800K) -
NON DIMMABLE**

COMPLETE WITH BUILT-IN ELECTRONIC DRIVER



OL-SMS6W-CW / OL-SMS6W-WW

**12W LED SQUARE SURFACE
DOWNLIGHT**



12W LED (75lm per Watt), AC85-285VAC, 160° Beam angle,
IP20, **COOL WHITE (±6000K) & WARM WHITE (±2800K)
- NON DIMMABLE**

COMPLETE WITH BUILT-IN ELECTRONIC DRIVER



OL-SMS12W-CW / OL-SMS12W-WW

18W LED ROUND SURFACE DOWNLIGHT

18W LED SQUARE SURFACE DOWNLIGHT



18W LED (75lm per Watt), AC85-285VAC, 160° Beam angle, IP20,
COOL WHITE (±6000K) & WARM WHITE (±2800K) - NON DIMMABLE


COMPLETE WITH BUILT-IN ELECTRONIC DRIVER



OL-SMR18W-CW / OL-SMR18W-WW



OL-SMS18W-CW / OL-SMS18W-WW



24W LED ROUND SURFACE DOWNLIGHT

24W LED SQUARE SURFACE DOWNLIGHT




24W LED (75lm per Watt), AC85-285VAC, 160° Beam angle, IP20,
COOL WHITE (±6000K) & WARM WHITE (±2800K) - NON DIMMABLE


COMPLETE WITH BUILT-IN ELECTRONIC DRIVER



OL-SMR24W-CW / OL-SMR24W-WW



OL-SMS24W-CW / OL-SMS24W-WW




6W LED ROUND SURFACE DOWNLIGHT WITH MAGNETIC COLOUR RING 

6W LED (75lm per Watt), AC85-285VAC, 160° Beam angle, IP20, **COOL WHITE (±6000K) & WARM WHITE (±2800K) - NON DIMMABLE**



OL-CY06W-CW-M / OLCY06W-WW-M

SIZE: 

Magnetic Colour Ring ordered Separately. Please Specify:


| | | |
|------------------|--------------------------|---|
| OL-CR6-BK | Black Colour Ring 6W |  |
| OL-CR6-BR | Bronze Colour Ring 6W |  |
| OL-CR6-NI | Nickel Colour Ring 6W |  |
| OL-CR6-RG | Rose Gold Colour Ring 6W |  |

12W LED ROUND SURFACE DOWNLIGHT WITH MAGNETIC COLOUR RING 

12W LED (75lm per Watt), AC85-285VAC, 160° Beam angle, IP20, **COOL WHITE (±6000K) & WARM WHITE (±2800K) - NON DIMMABLE**



OL-CY12W-CW-M / OLCY12W-WW-M

SIZE: 

Magnetic Colour Ring ordered Separately. Please Specify:


| | | |
|-------------------|---------------------------|---|
| OL-CR12-BK | Black Colour Ring 12W |  |
| OL-CR12-BR | Bronze Colour Ring 12W |  |
| OL-CR12-NI | Nickel Colour Ring 12W |  |
| OL-CR12-RG | Rose Gold Colour Ring 12W |  |

18W LED ROUND SURFACE DOWNLIGHT WITH MAGNETIC COLOUR RING 

18W LED (75lm per Watt), AC85-285VAC, 160° Beam angle, IP20, **COOL WHITE (±6000K) & WARM WHITE (±2800K) - NON DIMMABLE**



OL-CY18W-CW-M / OLCY18W-WW-M

SIZE: 

Magnetic Colour Ring ordered Separately. Please Specify:

| | | |
|-------------------|---------------------------|---|
| OL-CR18-BK | Black Colour Ring 18W |  |
| OL-CR18-BR | Bronze Colour Ring 18W |  |
| OL-CR18-NI | Nickel Colour Ring 18W |  |
| OL-CR18-RG | Rose Gold Colour Ring 18W |  |

24W LED ROUND SURFACE DOWNLIGHT WITH MAGNETIC COLOUR RING 

24W LED (75lm per Watt), AC85-285VAC, 160° Beam angle, IP20, **COOL WHITE (±6000K) & WARM WHITE (±2800K) - NON DIMMABLE**



OL-CY24W-CW-M / OLCY24W-WW-M

SIZE: 

Magnetic Colour Ring ordered Separately. Please Specify:

| | | |
|-------------------|---------------------------|---|
| OL-CR24-BK | Black Colour Ring 24W |  |
| OL-CR24-BR | Bronze Colour Ring 24W |  |
| OL-CR24-NI | Nickel Colour Ring 24W |  |
| OL-CR24-RG | Rose Gold Colour Ring 24W |  |



AIR FRAMELESS RANGE

180° BEAM ANGLE

ALL ROUND LIGHT EMITTING DOWLIGHTS



NEW!

10W LED ROUND AIR DOWNLIGHT



10W LED (75lm per Watt), AC85-265VAC, 180° Beam angle, WHITE DIFFUSER. **COOL WHITE (±6000K) - NON DIMMABLE**

COMPLETE WITH ELECTRONIC DRIVER



AIR-DLR-10-CW




Suitable for Spot Junction Box



75-90mm

SIZE:



NEW!

15W LED ROUND AIR DOWNLIGHT



15W LED (75lm per Watt), AC85-265VAC, 180° Beam angle, WHITE DIFFUSER. **COOL WHITE (±6000K) - NON DIMMABLE**

COMPLETE WITH ELECTRONIC DRIVER



AIR-DLR-15-CW




DETACHABLE DRIVER



125mm

SIZE:



NEW!

18W LED ROUND AIR DOWNLIGHT



18W LED (75lm per Watt), AC85-265VAC, 180° Beam angle, WHITE DIFFUSER. **COOL WHITE (±6000K) - NON DIMMABLE**

COMPLETE WITH ELECTRONIC DRIVER



AIR-DLR-18-CW




DETACHABLE DRIVER



150mm

SIZE:



NEW!

22W LED ROUND AIR DOWNLIGHT



22W LED (75lm per Watt), AC85-265VAC, 180° Beam angle, WHITE DIFFUSER. **COOL WHITE (±6000K) - NON DIMMABLE**

COMPLETE WITH ELECTRONIC DRIVER



AIR-DLR-22-CW




DETACHABLE DRIVER



205mm

SIZE:



REFER TO PAGES 97 SPARE DRIVERS.

AIR FRAMED RANGE

120° BEAM ANGLE



NEW!

6W LED ROUND AIR PANEL LIGHT



6W LED (75lm per Watt), AC85-265VAC, 120° Beam angle, WHITE DIFFUSER. **COOL WHITE (±6000K) - NON DIMMABLE**


COMPLETE WITH ELECTRONIC DRIVER



AIR-PLR-6-CW



SIZE:



NEW!

10W LED ROUND AIR PANEL LIGHT



10W LED (75lm per Watt), AC85-265VAC, 120° Beam angle, WHITE DIFFUSER. **COOL WHITE (±6000K) - NON DIMMABLE**


COMPLETE WITH ELECTRONIC DRIVER



AIR-PLR-10-CW



SIZE:



NEW!

15W LED ROUND AIR PANEL LIGHT




15W LED (75lm per Watt), AC85-265VAC, 120° Beam angle, WHITE DIFFUSER. **COOL WHITE (±6000K) - NON DIMMABLE**


COMPLETE WITH ELECTRONIC DRIVER



AIR-PLR-15-CW



SIZE:



NEW!

20W LED ROUND AIR PANEL LIGHT




20W LED (75lm per Watt), AC85-265VAC, 120° Beam angle, WHITE DIFFUSER. **COOL WHITE (±6000K) - NON DIMMABLE**


COMPLETE WITH ELECTRONIC DRIVER



AIR-PLR-20-CW



SIZE:



REFER TO PAGES 97 SPARE DRIVERS.



-lite[®]
creating a green legacy



NEW!

5W LED ROUND DOWNLIGHT




5W LED (80lm per Watt), AC100-240VAC, 100° Beam Angle, White Plastic. **COOL WHITE ($\pm 6000\text{K}$) & WARM WHITE ($\pm 2800\text{K}$) - NON DIMMABLE**

COMPLETE WITH ELECTRONIC DRIVER



OL-PDL-R5-CW / OL-PDL-R5-WW

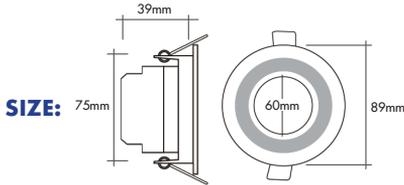

NEW!

7W LED ROUND DOWNLIGHT




7W LED (80lm per Watt), AC100-240VAC, 100° Beam Angle, White Plastic. **COOL WHITE ($\pm 6000\text{K}$) & WARM WHITE ($\pm 2800\text{K}$) - NON DIMMABLE**

COMPLETE WITH ELECTRONIC DRIVER



OL-PDL-R7-CW / OL-PDL-R7-WW

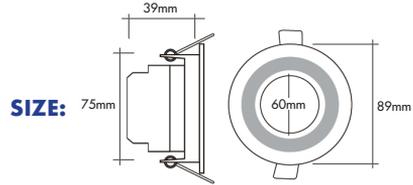

NEW!

9W LED ROUND DOWNLIGHT




9W LED (80lm per Watt), AC100-240VAC, 100° Beam Angle, White Plastic. **COOL WHITE ($\pm 6000\text{K}$) & WARM WHITE ($\pm 2800\text{K}$) - NON DIMMABLE**

COMPLETE WITH ELECTRONIC DRIVER



OL-PDL-R9-CW / OL-PDL-R9-WW

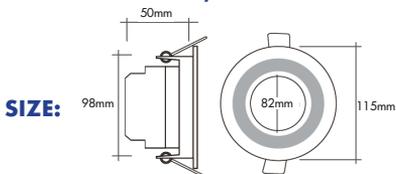

NEW!

12W LED ROUND DOWNLIGHT




12W LED (80lm per Watt), AC100-240VAC, 100° Beam Angle, White Plastic. **COOL WHITE ($\pm 6000\text{K}$) & WARM WHITE ($\pm 2800\text{K}$) - NON DIMMABLE**

COMPLETE WITH ELECTRONIC DRIVER



OL-PDL-R12-CW / OL-PDL-R12-WW

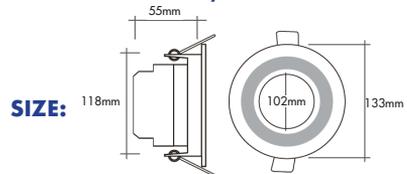


6W LED ROUND ADJUSTABLE DOWNLIGHT



6W LED (80lm per Watt), AC200-240VAC,
WHITE ALUMINIUM SURROUND. **COOL WHITE**
(±6000K) - NON DIMMABLE
COMPLETE WITH ELECTRONIC DRIVER &
CONNECTION BLOCK



OL-924-W-C

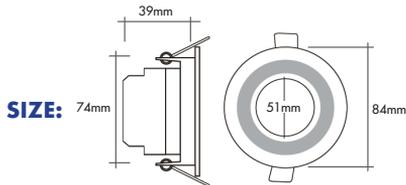


6W LED SQUARE ADJUSTABLE DOWNLIGHT



6W LED (80lm per Watt), AC200-240VAC,
WHITE ALUMINIUM SURROUND **COOL WHITE**
(±6000K) - NON DIMMABLE
COMPLETE WITH ELECTRONIC DRIVER &
CONNECTION BLOCK



OL-925-W-C

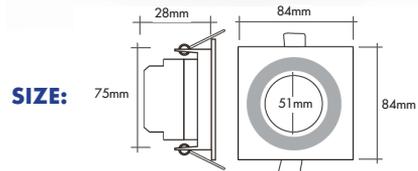


6W LED ROUND FIXED DOWNLIGHT



6W LED (80lm per Watt), AC200-240VAC,
ALUMINIUM SATIN NICKEL SURROUND. **COOL**
WHITE (±6000K) - NON DIMMABLE
COMPLETE WITH ELECTRONIC DRIVER &
CONNECTION BLOCK



OL-821-S-C

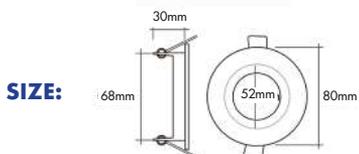


6W LED ROUND ADJUSTABLE DOWNLIGHT



6W LED (80lm per Watt), AC200-240VAC,
ALUMINIUM SATIN NICKEL SURROUND. **COOL**
WHITE (±6000K) - NON DIMMABLE
COMPLETE WITH ELECTRONIC DRIVER &
CONNECTION BLOCK



OL-822-S-C



6W LED SQUARE ADJUSTABLE DOWN LIGHT




6W LED (80lm per Watt), AC200-240VAC, ALUMINIUM SATIN NICKEL SURROUND. **COOL WHITE ($\pm 6000K$) - NON DIMMABLE**

COMPLETE WITH ELECTRONIC DRIVER & CONNECTION BLOCK



OL-824-S-C



SIZE: 82mm



6W 2 PIN LED SPARE LAMP & CONNECTION BLOCK



6W 2 PIN LED LAMP (90lm per Watt), AC220-240VAC, 30mA, CONNECTION BLOCK. **COOL WHITE ($\pm 6500K$) - NON DIMMABLE**



OL-LED2PIN+CB

SPARE LAMP FOR:
OL-924-W-C
OL-925-W-C

6W LED SPARE LAMP & CONNECTION BLOCK



6W LED LAMP (90lm per Watt), AC220-240VAC, 30mA, CONNECTION BLOCK. **COOL WHITE ($\pm 6500K$) - NON DIMMABLE**



OL-LED+CB


SPARE LAMP FOR:
OL-821-S-C
OL-822-S-C
OL-824-S-C

ROUND FIXED DOWNLIGHT FITTING

ROUND FIXED WHITE CAST IRON FITTING ONLY WITH RETAINING SPRING.



OL-8221-W

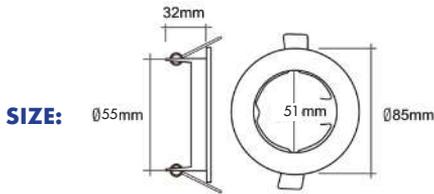


ROUND ADJUSTABLE DOWNLIGHT FITTING

ROUND ADJUSTABLE ALUMINIUM WHITE FITTING ONLY WITH RETAINING SPRING.



OL-802-W

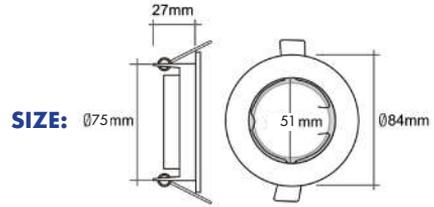


ROUND FIXED DOWNLIGHT FITTING

ROUND FIXED CAST IRON SATIN NICKEL FITTING ONLY WITH RETAINING SPRING.



OL-8221-S

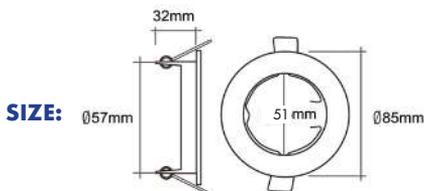


ROUND ADJUSTABLE DOWNLIGHT FITTING

ROUND ADJUSTABLE ALUMINIUM SATIN NICKEL FITTING ONLY WITH RETAINING SPRING.



OL-802-S

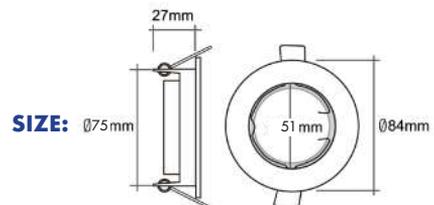


ROUND FIXED DOWNLIGHT FITTING

ROUND FIXED ALUMINIUM SATIN NICKEL FITTING ONLY WITH RETAINING RING



OL-821-S

REMOVABLE RING ALLOWING FOR EASY BULB REPLACEMENT

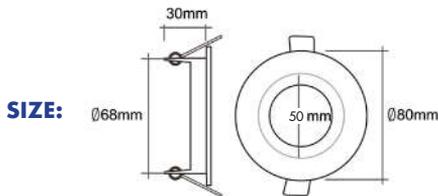


ROUND ADJUSTABLE DOWNLIGHT FITTING

ROUND ADJUSTABLE ALUMINIUM SATIN NICKEL FITTING ONLY WITH RETAINING RING.



OL-822-S

REMOVABLE RING ALLOWING FOR EASY BULB REPLACEMENT

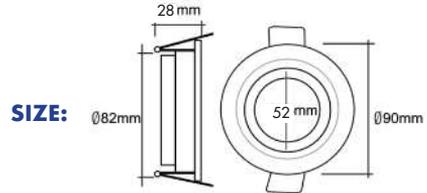


SQUARE ADJUSTABLE DOWNLIGHT FITTING

SQUARE ADJUSTABLE ALUMINIUM SATIN NICKEL FITTING ONLY WITH RETAINING RING



OL-824-S

REMOVABLE RING ALLOWING FOR EASY BULB REPLACEMENT

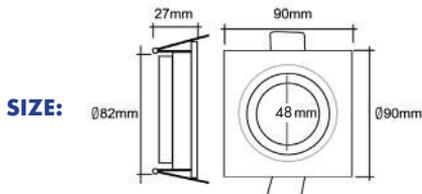

GU10 LAMP HOLDER & CONNECTION BLOCK

GU10 LAMP HOLDER ONLY WITH A CONNECTION BLOCK



OL-GU10LH+CB



NEW!


ROUND FIXED DOWNLIGHT FITTING

ROUND FIXED WHITE CAST IRON FITTING ONLY.



OL-901-W

REMOVABLE RING ALLOWING FOR EASY BULB REPLACEMENT

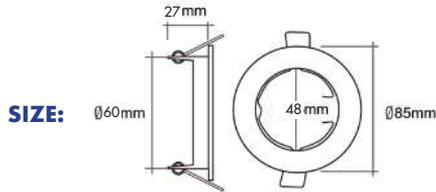

NEW!


ROUND ADJUSTABLE DOWNLIGHT FITTING

ROUND ADJUSTABLE CAST IRON WHITE FITTING ONLY.



OL-902-W

REMOVABLE RING ALLOWING FOR EASY BULB REPLACEMENT

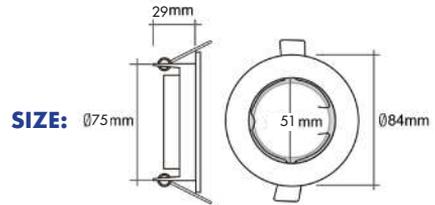

NEW!


ROUND FIXED DOWNLIGHT FITTING

WHITE ROUND FIXED
PLASTIC FITTING ONLY



OL-1255-W

REMOVABLE RING ALLOWING FOR EASY BULB REPLACEMENT

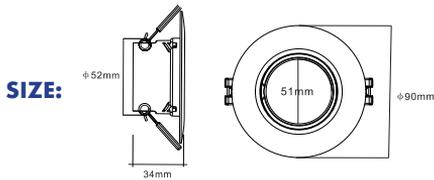

NEW!


ROUND FIXED DOWNLIGHT FITTING

BLACK ROUND FIXED
PLASTIC FITTING ONLY



OL-1255-B

REMOVABLE RING ALLOWING FOR EASY BULB REPLACEMENT

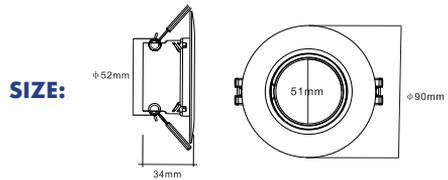

NEW!


ROUND ADJUSTABLE DOWNLIGHT FITTING

WHITE ROUND ADJUSTABLE
PLASTIC FITTING ONLY



OL-912-W

REMOVABLE RING ALLOWING FOR EASY BULB REPLACEMENT

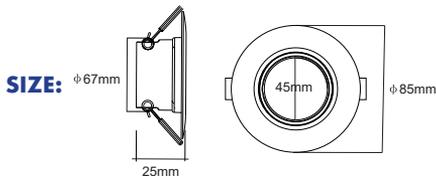


NEW!

ROUND FIXED DOWNLIGHT FITTING

WHITE ROUND ANTI-GLARE FIXED DEEP
RECESSED PLASTIC FITTING ONLY



OL-01175A-W

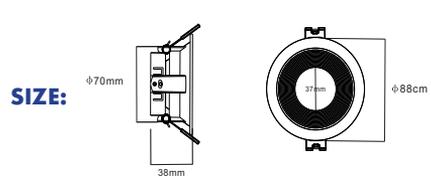

NEW!


ROUND FIXED DOWNLIGHT FITTING

BLACK & WHITE ROUND ANTI-GLARE FIXED DEEP RECESSED PLASTIC FITTING ONLY



OL-01175A-BW

SIZE:



NEW!


ROUND FIXED DOWNLIGHT FITTING

BLACK ROUND ANTI-GLARE FIXED DEEP RECESSED PLASTIC FITTING ONLY



OL-01175A-B

SIZE:

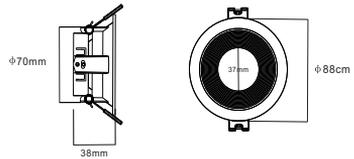

NEW!


ROUND ADJUSTABLE DOWNLIGHT FITTING

WHITE ROUND ANTI-GLARE ADJUSTABLE SHALLOW RECESSED PLASTIC FITTING ONLY



OL-0575-W

SIZE:

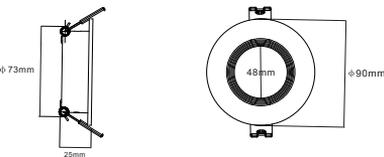

NEW!


ROUND ADJUSTABLE DOWNLIGHT FITTING

BLACK ROUND ANTI-GLARE ADJUSTABLE SHALLOW RECESSED PLASTIC FITTING ONLY



OL-0575-B

SIZE:

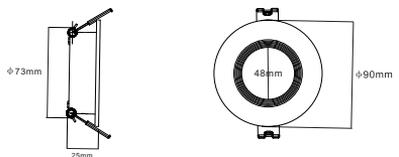

NEW!


SQUARE ADJUSTABLE DOWNLIGHT FITTING

WHITE SQUARE ANTI-GLARE ADJUSTABLE SHALLOW RECESSED 1 LAMP PLASTIC FITTING ONLY



OL-058080-W

SIZE:



NEW!


RECTANGULAR ADJUSTABLE DOWNLIGHT FITTING

WHITE RECTANGULAR ANTI-GLARE ADJUSTABLE SHALLOW RECESSED 2 LAMP PLASTIC FITTING ONLY



OL-0580160-W

SIZE:

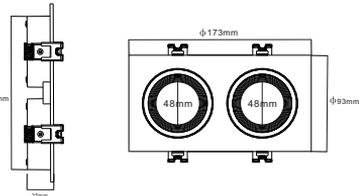

NEW!


RECTANGULAR ADJUSTABLE DOWNLIGHT FITTING

WHITE RECTANGULAR ANTI-GLARE ADJUSTABLE SHALLOW RECESSED 3 LAMP PLASTIC FITTING ONLY



OL-0580240-W

SIZE:





-lite®
creating a green legacy


GU10 LED SPOT LIGHT FITTING



Square, Die Cast Aluminium, 3 Wire,
AC220VAC, 1 x **GU10** (Max 35W), IP20,
Lamp not included, BLACK & WHITE
FITTING

OL-GU10SPOT-B/OL-GU10SPOT-W

SIZE:



TRACK, LIGHT FITTING & POWER ADAPTER TO BE ORDERED SEPERATELY.



TRACK LIGHT POWER ADAPTER

AC220VAC, 3 Wire, Power Adapter, IP20,
BLACK & WHITE ADAPTER



OL-PFED-B/OL-PFED-W

1 METER TRACK

1 Meter, Die Cast Aluminium, 3 Wire,
AC220VAC, IP20, **Power Adapter**
not included, BLACK & WHITE TRACK
FITS A MAX OF 4 LIGHT FITTINGS



OL-1TRACK-B/OL-1TRACK-W

NEW!

TRACK LIGHT L-TYPE POWER ADAPTER

AC220VAC, 3 Wire, Power Adapter, IP20,
BLACK & WHITE ADAPTER



OL-LCON-B/OL-LCON-W

NEW!

TRACK LIGHT I-TYPE ADAPTER

BLACK & WHITE ADAPTER



OL-ICON-B/OL-ICON-W

NEW!

TRACK LIGHT T-TYPE POWER ADAPTER

AC220VAC, 3 Wire, Power Adapter, IP20,
BLACK ADAPTER



OL-TCON-B

NEW!

TRACK LIGHT T-TYPE POWER ADAPTER

AC220VAC, 3 Wire, Power Adapter, IP20,
WHITE ADAPTER



OL-TCON-W

18W LED SQUARE PANEL LIGHT




18W LED (80lm per Watt), AC110-240VAC, IP20, **COOL WHITE ($\pm 6000K$) - NON DIMMABLE**



LED300CW

SIZE:



48W LED SQUARE PANEL LIGHT




48W LED (80lm per Watt), AC110-240VAC, IP20, **COOL WHITE ($\pm 6000K$) - NON DIMMABLE**



LED600CW

SIZE:



76W LED RECTANGULAR PANEL LIGHT




76W LED (80lm per Watt), AC110-240VAC, IP20, **COOL WHITE ($\pm 6000K$) - NON DIMMABLE**



LED1.2CW

SIZE:



REFER TO PAGE 73 FOR BATTERY BACK UP KITS & 97 FOR SPARE DRIVERS .

CEILING MOUNT FIXTURE



- LEDCMF3X3** 300x300x50mm for LED300CW
- LEDCMF6X6** 600x600x50mm for LED600CW
- LEDCMF1,2X6** 1200x600x50mm for LED1.2CW

HANGING (SUSPENDED) FIXTURE



- LEDHF3** Suspended Fixture for LED300CW
- LEDHF6** Suspended Fixture for LED600CW
- LEDHF12** Suspended Fixture for LED1.2CW

EMBEDDED FIXTURES



- LEDEFI3** Embedded Fixture for LED300CW
- LEDEFI6** Embedded Fixture for LED600CW
- LEDEFI12** Embedded Fixture for LED1.2CW

SPRING BUCKLE FIXTURES



- LEDSPi3** Spring buckle Fixture for LED300CW
- LEDSPi6** Spring buckle Fixture for LED600CW
- LEDSPi12** Spring buckle Fixture for LED1.2CW



20W 4 FOOT T8 GLASS TUBE



20W LED (80lm per Watt), AC100-240VAC,
Single Sided Isolated, **COOL WHITE (±6000K)**
& **WARM WHITE (±2800K)**



LED4FT20W-CW / LED4FT20W-WW

SIZE:



20W 5 FOOT T8 GLASS TUBE



20W LED (80lm per Watt), AC100-240VAC,
Single Sided Isolated, **COOL WHITE (±6000K)**
& **WARM WHITE (±2800K)**



LED5FT20W-CW / LED5FT20W-WW

SIZE:



NOTE: GLASS TUBES CANNOT BE USED IN IP65 FITTINGS. ONLY TO BE USED IN OPEN CHANNEL FITTINGS.

WEATHERPROOF TUBE FITTINGS

IP65, DOUBLE LED TUBE FITTING ONLY



**** FOR SINGLE SIDED TUBES ONLY**

OL-2F-LED

2 Foot IP65 Double LED Fitting

OL-4F-LED

4 Foot IP65 Double LED Fitting

OL-5F-LED

5 Foot IP65 Double LED Fitting

INDOOR TUBE FITTINGS

IP20, DOUBLE LED TUBE FITTING ONLY



**** FOR SINGLE SIDED TUBES ONLY**

OL-2S-D

2 Foot IP20 Double LED Fitting

OL-4S-D

4 Foot IP20 Double LED Fitting

OL-5S-D

5 Foot IP20 Double LED Fitting


20W 2 FOOT LED IP65 FITTING



20W LED (80lm per Watt), AC110-240VAC,
Single Sided Isolated, **COOL WHITE ($\pm 6000K$)**
COMPLETE FITTING



OL-2F-LED-C




40W 4 FOOT LED IP65 FITTING



40W LED (80lm per Watt), AC110-240VAC,
Single Sided Isolated, **COOL WHITE ($\pm 6000K$)**
COMPLETE FITTING



OL-4F-LED-C




50W 5 FOOT LED IP65 FITTING



50W LED (80lm per Watt), AC110-240VAC,
Single Sided Isolated, **COOL WHITE ($\pm 6000K$)**
COMPLETE FITTING



OL-5F-LED-C

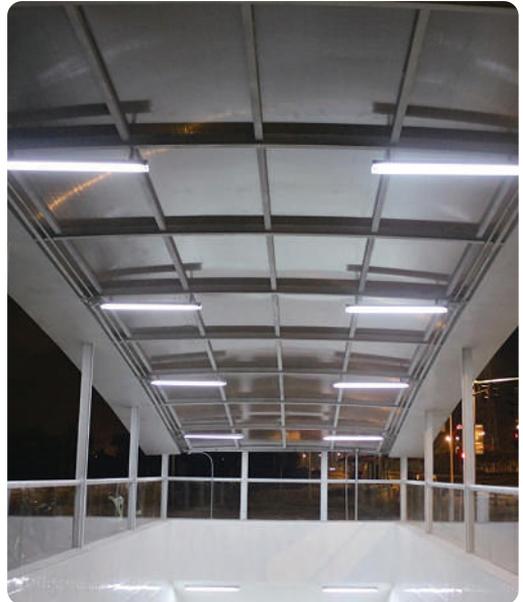

NEW!

RESPIRO 4 BLADE CEILING FAN WITH 18W LED LIGHT



4 Blade Ceiling Fan, White Motor, Plywood Blades, Blade Size: 1200mm, 70W 3 Speed Silent 200-240VAC Motor. **WARM WHITE ($\pm 2800K$), NATURAL WHITE ($\pm 4000K$), COOL WHITE ($\pm 6000K$) - NON DIMMABLE**



3 Year Warranty On The Fan Motor

OLF-300WH

NEW!

SPIRADO 4 BLADE CEILING FAN WITH 18W LED LIGHT



4 Blade Ceiling Fan, White Motor, 1 White Plywood Blades, Blade Size: 1200mm, 70W 3 Speed Silent 200-240VAC Motor. **WARM WHITE ($\pm 2800K$), NATURAL WHITE ($\pm 4000K$), COOL WHITE ($\pm 6000K$) - NON DIMMABLE**



3 Year Warranty On The Fan Motor

OLF-301WH

NEW!

VENTO 3 BLADE CEILING FAN WITH 24W LED LIGHT



3 Blade Ceiling Fan, Black Motor, Wood Blades, Blade Size: 1200mm, 70W 3 Speed Silent 200-240VAC Motor. **WARM WHITE ($\pm 2800K$), NATURAL WHITE ($\pm 4000K$), COOL WHITE ($\pm 6000K$) - NON DIMMABLE**



3 Year Warranty On The Fan Motor

OLF-305BW

NEW!

MIRAN 3 BLADE CEILING FAN WITH 18W LED LIGHT



3 Blade Ceiling Fan, White Motor, White ABS Plastic Blades, Blade Size: 1320mm, 90W 3 Speed Silent 200-240VAC Motor. **WARM WHITE ($\pm 2800K$), NATURAL WHITE ($\pm 4000K$), COOL WHITE ($\pm 6000K$) - NON DIMMABLE**



3 Year Warranty On The Fan Motor

OL-317WP

ALL FANS ARE SUPPLIED WITH A REMOTE IN THE BOX & 2 DOWN ROD LENGTHS IN 12.5cm or 25cm

Remote Timer Setting : 1,2,4 & 8 Hours

NEW!

SILENTA 5 BLADE CEILING FAN WITH 18W LED LIGHT



5 Blade Ceiling Fan, White Motor, White Plywood Blades, Blade Size: 1320mm, 70W 3 Speed Silent 200-240VAC Motor. **WARM WHITE (±2800K), NATURAL WHITE (±4000K), COOL WHITE (±6000K) - NON DIMMABLE**

3 Year Warranty On The Fan Motor



OLF-315WH

NEW!

SILENTA 5 BLADE CEILING FAN WITH 18W LED LIGHT



5 Blade Ceiling Fan, Sand Nickel Motor, Mahogany Blades, Blade Size: 1320mm, 70W 3 Speed Silent 200-240VAC Motor. **WARM WHITE (±2800K), NATURAL WHITE (±4000K), COOL WHITE (±6000K) - NON DIMMABLE**

3 Year Warranty On The Fan Motor



OLF-315SW

NEW!

DUAL CIRCULATION ARIOSOA 3 BLADE CEILING FAN

3 Blade Ceiling Fan, Black Motor, Black ABS Blades, Blade Size: 1420mm, 35W 3 Speed Silent 200-240VAC Motor. ***NB 3 forward settings for cooling in summer & 3 reverse settings to help cut heating costs in winter by circulating warm air without causing draughts**

SUMMER & WINTER APPLICATION

3 Year Warranty On The Fan Motor



OLF-147BL

NEW!

ELICA 3 BLADE CEILING FAN

3 Blade Ceiling Fan, Sand Nickel Motor, Mahogany Blades, Blade Size: 1320mm, 70W 3 Speed Silent 200-240VAC Motor.

3 Year Warranty On The Fan Motor



OLF-193BW

IP20 LED STRIP LIGHTS



IP20, 5m, Self Adhesive, Complete with Power adapter. **COOL WHITE, WARM WHITE, RED, GREEN, BLUE & YELLOW**



OL-6020
SIZE: 5m

JOIN CONNECTORS FOR OL-6020 & OL-6065

JOIN CONNECTORS



OL-CON
ONLY FOR OL-6020

OL-CON-IP65
ONLY FOR OL-6065

IP65 LED STRIP LIGHTS



IP65, 5m, Self Adhesive, Complete with Power adapter. **COOL WHITE, WARM WHITE, RED, GREEN, BLUE & YELLOW**



OL-6065
SIZE: 5m

POWER ADAPTER

12VDC 2A Power Supply Adapter (24W) **TO BE USED WITH OL-6020 & OL-6065**



OL-2A

IP67 LED ROPE LIGHTS



IP67, 5m, Power Cord to be ordered separately. **COOL WHITE, WARM WHITE, RED, GREEN, BLUE & YELLOW**



OL-50675
SIZE: 5m

END CAP

End Cap for OL-50675



OL-EC

POWER CORD

TO BE USED WITH OL-50675 (MAX 50m)



OL-5067-220-SQ

IP20 LED STRIP LIGHTS



IP20, 5m, Self Adhesive, Complete with Power adapter & Remote. **RGB COLOUR CHASING LIGHTS.**



OL-M5020-RGB

SIZE: 5m



IP65 LED STRIP LIGHTS



IP65, 5m, Self Adhesive, Complete with Power adapter & Remote. **RGB COLOUR CHASING LIGHTS.**



OL-M5065-RGB

SIZE: 5m



IP20 LED STRIP LIGHTS



IP20, 5m, Self Adhesive, Complete with Power adapter & Remote. **RGB 16 COLOUR CHANGING LIGHTS.**



OL-C5020-RGB

SIZE: 5m



IP65 LED STRIP LIGHTS



IP65, 5m, Self Adhesive, Complete with Power adapter & Remote. **RGB 16 COLOUR CHANGING LIGHTS.**



OL-C5065-RGB

SIZE: 5m



POWER ADAPTER

12VDC 6A Power Supply Adapter **TO BE USED WITH OL-M5020-RGB, OL-M5065-RGB, OL-C5020-RGB, OL-C5065-RGB.**



OL-6A

NEW!

21W LED STRING LIGHT



1,4W Per LED Bulb, 15 Super Bright LED Bulbs, 15 Meters, AC100-240VAC, Straight Filament, IP65, **WARM WHITE ($\pm 2800K$) - NON DIMMABLE**



OL-STR-15-21W

OL-STR-1W-SB - 1,4W SPARE LED BULB

NEW LED NEON FLEX STRIP LIGHTS



IP65, 10m.
Complete with power adapter,
2x end caps, 1x middle joint
connector, 5x aluminium
mounting clips.

**COOL WHITE, WARM
WHITE, RED, GREEN, BLUE,
YELLOW**

**LEDFLEX-CW-10M, LEDFLEX-WW-10M,
LEDFLEX-R-10M,
LEDFLEX-G-10M, LEDFLEX-B-10M,
LEDFLEX-Y-10M**

IP65 LED NEON FLEX COLOUR CHANGING

IP65, 10m, Complete with RGB controller & power supply, 2x end caps, 1x middle joint connector,
5x aluminium mounting clips, **COLOUR CHANGING RGB**



LEDFLEX-RGB-10M

LED NEON FLEX ACCESSORIES

NEON FLEX RGB CONTROLLER

RGB Controller with power supply.



OL-RGBCONT

POWER ADAPTER

2A Power Supply **TO BE USED WITH
SINGLE COLOUR NEON FLEX**



OL-2A-FLEX

MIDDLE JOINT CONNECTOR

Middle Joint Connectors for Neon Flex



OL-MID-2PIN for Single Colours
OL-MID-4PIN for RGB

END CAP

End Cap for Neon Flex



OL-END-SMALL for Single Colours
OL-END-RGB for RGB

MOUNTING CLIP

Aluminium Mounting Clips
PACK OF 5



OL-AMCLIPS-2835 for Single Colours
OL-AMCLIPS-RGB for RGB


LED EXIT LIGHT - SURFACE MOUNT



3W LED. Double sided fitting with reflector.
3 Hour emergency battery backup. Complete with 3
 Legends (EXIT left, right or forward).
SURFACE MOUNT



LEDEXIT-SURFACE




3W LED EMERGENCY LIGHT



220-240VAC, Battery = Ni-Cd 3.6V 2200mAh,
 Recharging Time = 24 Hours, **3 Hour emergency
 battery backup.**



LEDEMER-3W



Cut Out Size : 32mm

10W LED EMERGENCY BATTERY BACK-UP KIT




48W Input Power, Battery = Ni-Cd 7.2V 4400mAh,
 Recharging Time = 24 Hours, **3 Hour emergency
 battery backup.**



LED-BB10W

SIZE:



**Suitable For: LED600CW x 1 per light &
 LED1.2CW x 2 per light**

REFER TO PAGE 64